


Xcab S 18U-47U 600 mm width, 600/800/1000 mm depth



Xcab S 18U-47U 600 mm width, 600/800/1000 mm depth

Knock-out hole for Top & bottom cover

Symmetrical frame structure

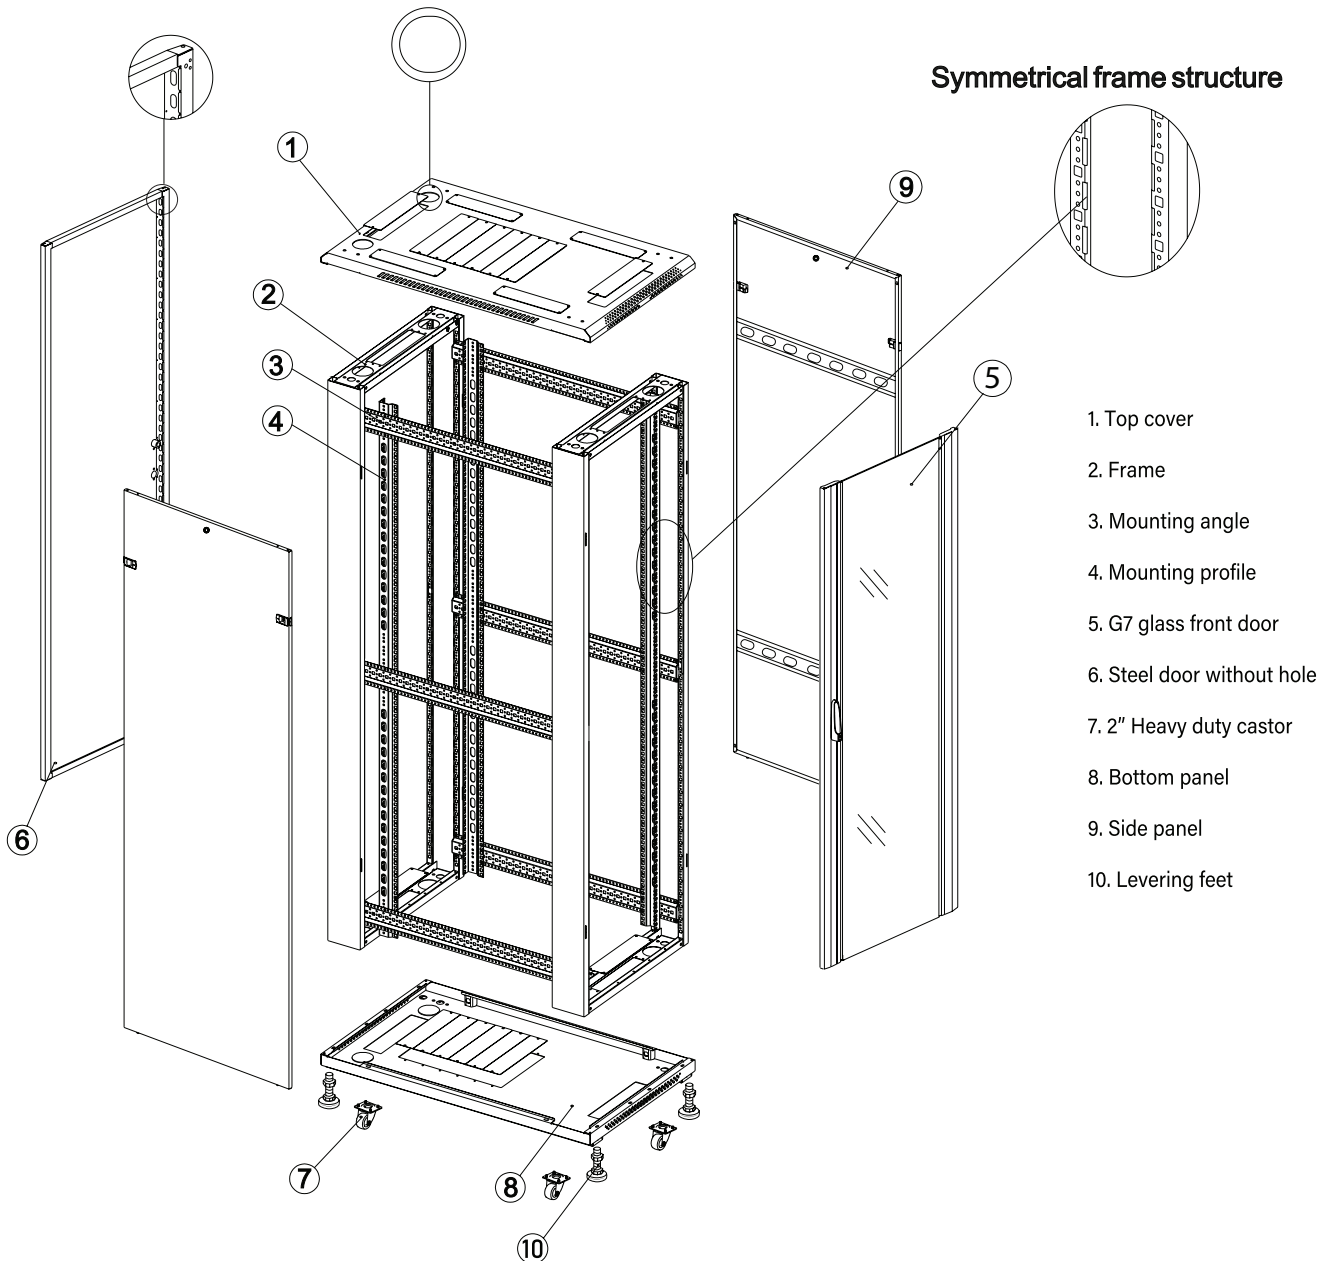

- Modular fan modules, single inventory to meet all type of cabinets to save your inventory cost.
- Coated aluminum zinc material, when the equipment is installed automatically equipotential.
- Cable entrance holes on two sides to make your wires in-and-out more convenient, and meet your requirements of strong and weak electricity cable arrangement.
- The main parts have pre-grounding stud, stud with protective cover.
- Front and rear door can be opened from left and right.
- Castors and adjustable feet can be used at the same time.
- A full range of optional accessories.

Xcab S 18U-47U 600 mm width, 600/800/1000 mm depth


Elegant lock



Cabinet doors with cushion



Zinc mounting angle available for binding wires

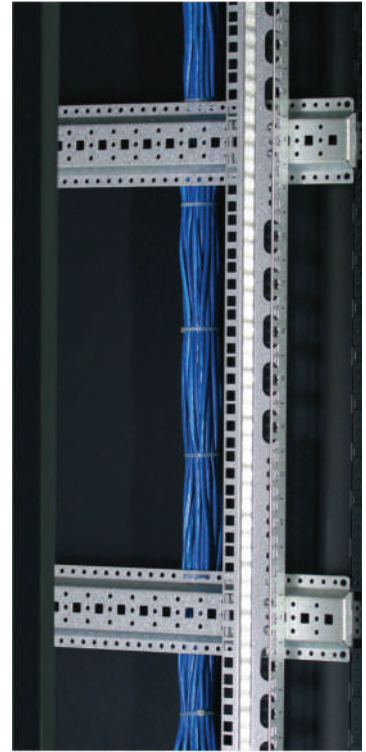

Inside view after fan module installation



Bottom cover of cabinet can be ground




M12 feet installation




Xcab S 18U-47U 600 mm width, 600/800/1000 mm depth

The cable entry at bottom

- The cable entries are closed separately;
- Meet strong and weak wire's separated request;
- Reach 1 000pcs Cat6 cable's entry;
- Round the corner, can protect cable;

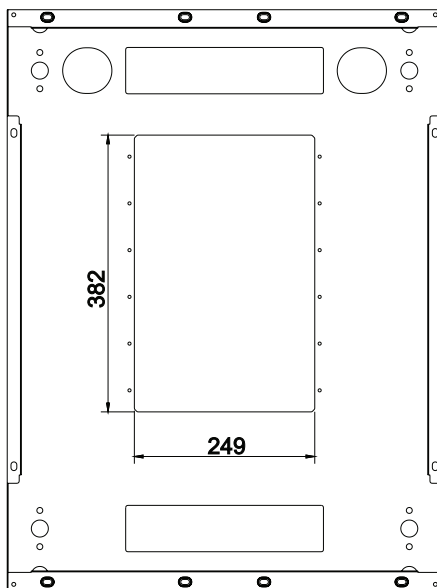


Depth ≥ 800mm

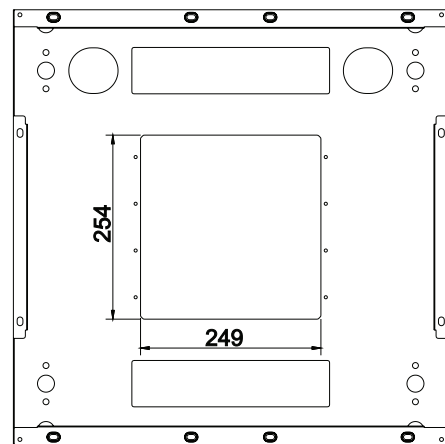

Depth < 800mm

The cable entry and fan units on top:

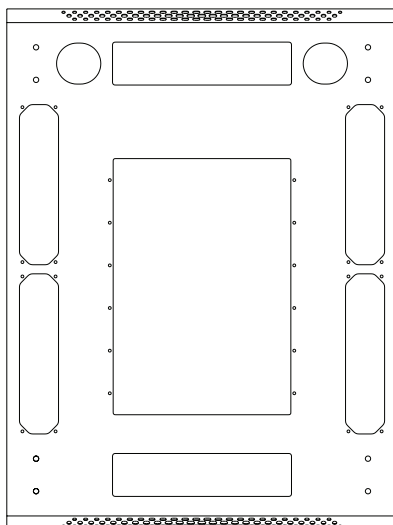


The view of the holes on top



Fan units for top cover
(up to six pieces)

Xcab S 18U-47U 600 mm width, 600/800/1000 mm depth

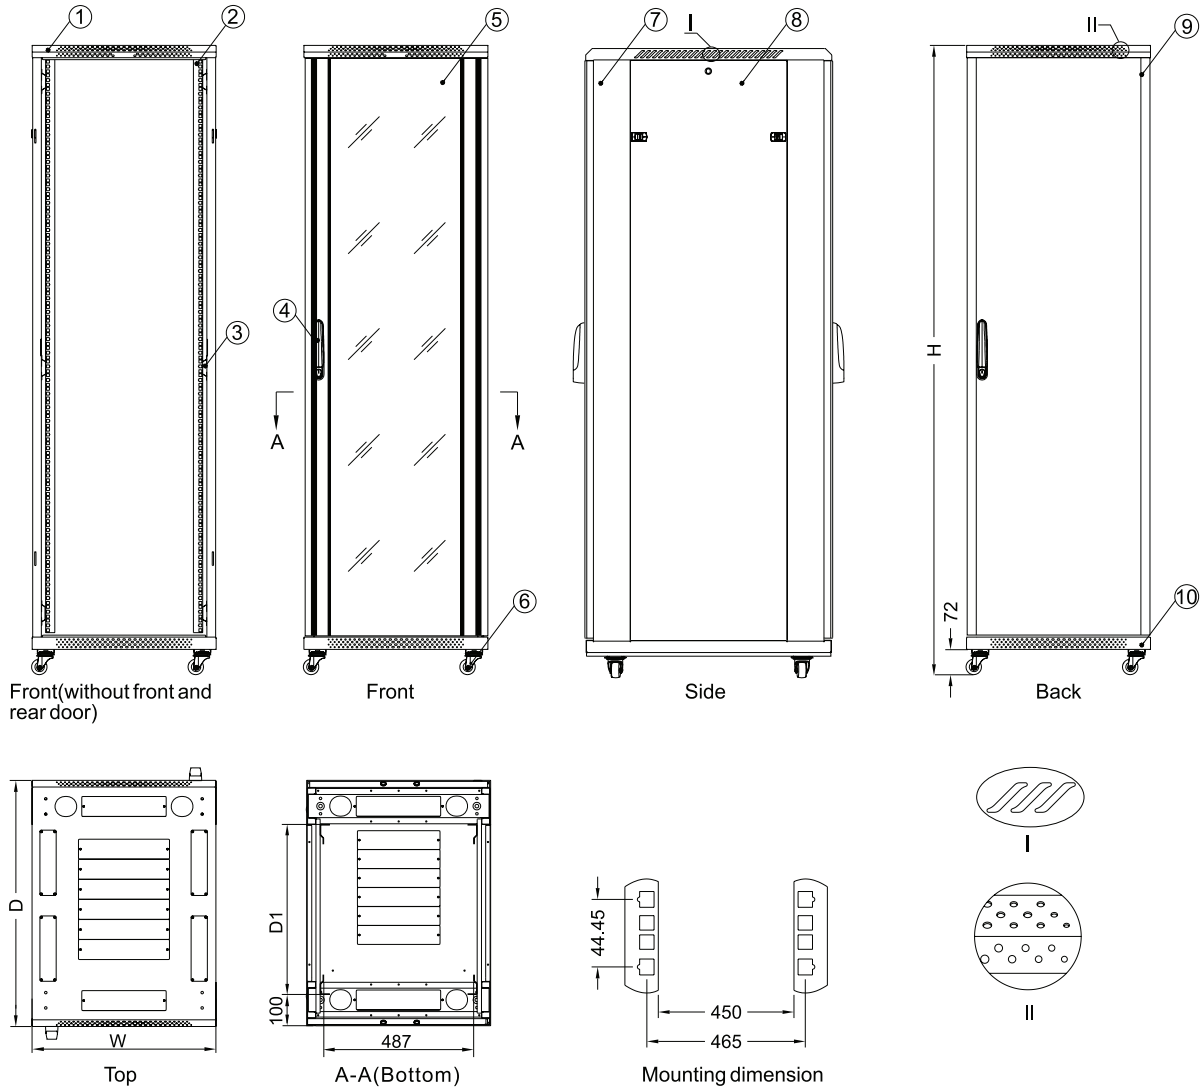

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Top cover	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
2	Mounting profile	4	Piece	Fingerprint-resistant aluminum deposited zinc plate t2.0	Material	---
3	Mounting angle	6	Piece	Fingerprint-resistant aluminum deposited zinc plate t1.5	Material	4pcs for lower 32U
4	Luxury lock	2	Piece	---	Black	---
5	Front door	1	Piece	5mm Toughened glass/SPCC t1.2	Powder coated	---
6	2" heavy duty castor*	4	Piece	---	---	---
7	Frame	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
8	Side panel	2	Piece	SPCC cold rolled steel t1.2	Powder coated	---
9	Rear door	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---
10	Bottom panel	1	Piece	SPCC cold rolled steel t1.2	Powder coated	---

*Castors and adjustable feet can be used at the same time

Xcab S 18U-47U 600 mm width, 600/800/1000 mm depth

Model No.	Capacity (U)	Width (mm)	Depth (mm)	D1 (mm)	Height (mm)	Packing Dimension	Volume (M³)
18U6060S	18	600	600	361	988	670*700*1028	0.4821
18U6080S			800	561		670*900*1028	0.6199
18U6090S			900	661		670*1000*1028	0.6888
18U60100S			1000	736		670*1100*1028	0.7576
22U6060S	22	600	600	361	1166	670*700*1196	0.5609
22U6080S			800	561		670*900*1196	0.7212
22U6090S			900	661		670*1000*1196	0.8013
22U60100S			1000	736		670*1100*1196	0.8815
27U6060S	27	600	600	361	1388	670*700*1418	0.6650
27U6080S			800	561		670*900*1418	0.8551
27U6090S			900	661		670*1000*1418	0.9501
27U60100S			1000	736		670*1100*1418	1.0451
32U6060S	32	600	600	361	1610	670*700*1640	0.7692
32U6080S			800	561		670*900*1640	0.9889
32U6090S			900	661		670*1000*1640	1.0988
32U60100S			1000	736		670*1100*1640	1.2087
37U6060S	37	600	600	361	1833	670*700*1863	0.8737
37U6080S			800	561		670*900*1863	1.1234
37U6090S			900	661		670*1000*1863	1.2482
37U60100S			1000	736		670*1100*1863	1.3730
37U60120S			1200	736		670*1300*1863	1.6227
42U6060S	42	600	600	361	2055	670*700*2085	0.9779
42U6080S			800	561		670*900*2085	1.2573
42U6090S			900	661		670*1000*2085	1.3970
42U60100S			1000	736		670*1100*2085	1.5366
42U60110S			1100	736		670*1200*2085	1.6763
42U60120S			1200	736		670*1300*2085	1.8160
47U6060S	47	600	600	361	2277	670*700*2307	1.0820
47U6080S			800	561		670*900*2307	1.3911
47U6090S			900	661		670*1000*2307	1.5457
47 U60100S			1000	736		670*1100*2307	1.7003
47U60110S			1100	736		670*1200*2307	1.8548
47U60120S			1200	736		670*1300*2307	2.0094

Surface finish:

- Degreasing, Vitrification, Power coated;

Degree of protection:

- IP20.

Loading capacity:

- Static loading: 800KG (with ajustable feet)